


Ljuds™ Loop 1200



Trademark and 2024 ©

Ljuds™ Loop panels feature circular grooves across the surface, adding depth and rhythm to their design. By arranging the panels in various orientations, you can create a repetitive pattern of intersecting circular and linear grooves, resulting in a richly textured geometric aesthetic. The wood fibres are sound absorbent and the cement matrix has high moisture diffusion and air permeability. This helps to even out the relative humidity (RH) in the environment.

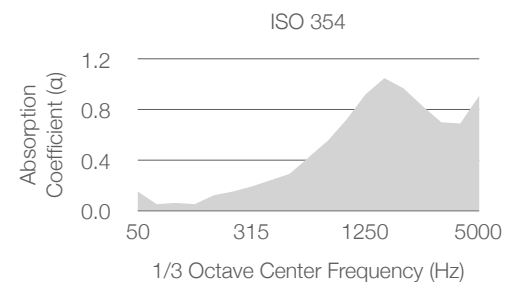

Technical Specifications

| | |
|--------------------|---|
| Material | Recyclable Wood Fibres in Cement Matrix |
| Standard Dimension | 600mmW x 1200mmH |
| Standard Thickness | 15mm, 20mm, 25mm |
| Bevel Dimensions | 20mmW x 10mmH |
| Bevel Angle | 45 Degrees |
| Chamfered Edge | 4 Sided |
| Eco-Friendly Test | EN 13986 = E1 |
| Fire-Rated Test | EN 13501-1 = Class B s1, d0 |
| Acoustic Test | ISO 354 = NRC 0.53 with 25mm Ljuds™ |