


Ljuds™ Loop 300



Trademark and 2024 ©

Ljuds™ Loop panels feature circular grooves across the surface, adding depth and rhythm to their design. By arranging the panels in various orientations, you can create a repetitive pattern of intersecting circular and linear grooves, resulting in a richly textured geometric aesthetic. The wood fibres are sound absorbent and the cement matrix has high moisture diffusion and air permeability. This helps to even out the relative humidity (RH) in the environment.

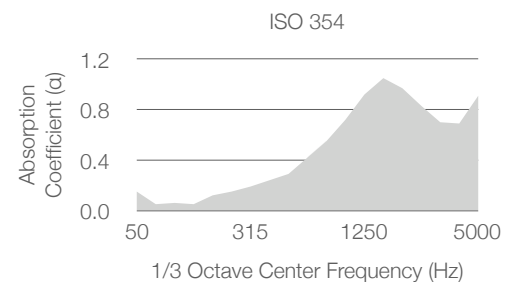

Technical Specifications

Material	Recyclable Wood Fibres in Cement Matrix
Standard Dimension	300mmW x 300mmH
Standard Thickness	15mm, 20mm, 25mm
Bevel Dimensions	20mmW x 10mmH
Bevel Angle	45 Degrees
Chamfered Edge	4 Sided
Eco-Friendly Test	EN 13986 = E1
Fire-Rated Test	EN 13501-1 = Class B s1, d0
Acoustic Test	ISO 354 = NRC 0.53 with 25mm Ljuds™